
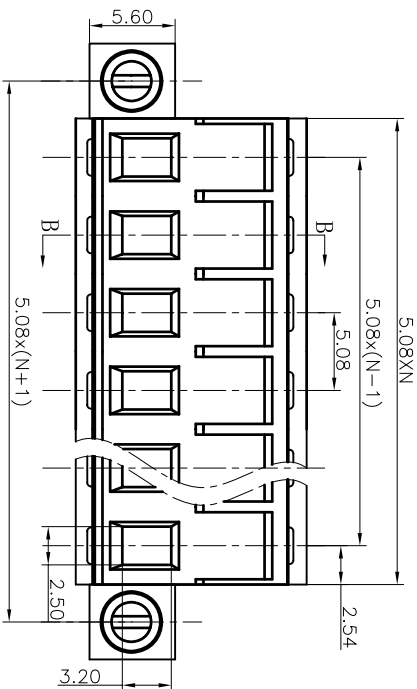





REVISION RECORD			
REV	ECO	DESCRIPTION	DATE
1		图面更新	04/17/06
2		增加VDE、CE刻字	02/25/08
3		增加防脱卡点位置尺寸标注	02/06/09

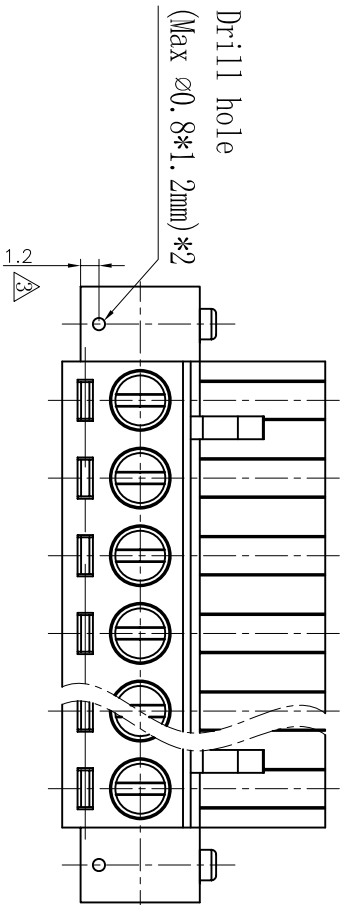

Pitch range in mm	over	to	over	to	over	to	over	to	over	to	over	to	over	to
6 to 10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.10						

1. Pitch: 5.08mm, Poles: 2-24P
2. Rated voltage/current: UL 300V/15A VDE 320V/20A
3. Operation temperatures: -45°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000 Ω/DC1000V
6. Wire Range: 28~12AWG, 2.5mm²
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

SECTION B-B

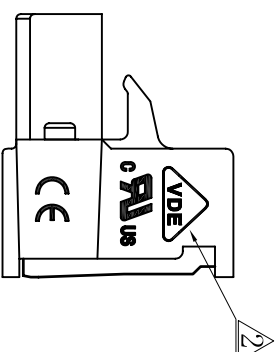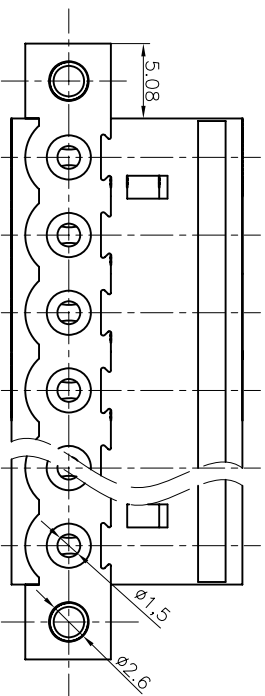

VIEW A

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	ZEDGKM-5.08-Housing	1011A0YXXA(H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
2	ZEDGKM-5.08-Cover	1005C0YXXA(H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
3	ZEDGKM-5.08-Screws-M2.5	S000001370(H)	XX+2	Steel	Cr ³⁺ Zn

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG128 Brass cage	X000000020(H)	XX	Brass	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	ZEDGKM-5.08-Clamp	1005B00010(H)	XX	Phosphor bronze	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
2	ZEDGKM-5.08-Cover	1005C0YXXA(H)	1	PA66	UL94V-0

DETACHED LISTS

THIRD ANGLE PROJECTION

SCALE : 1:1

DO NOT SCALE DRAWING

SHEET 1 OF 1

DEGSON
宁波德胜电子有限公司
DEGSON®
DEGSON ELECTRONICS CO., LTD.

NAME
ZEDGKM-5.08-XXP-1Y-00A(H)

DRAWING NO. ZEDGKM-5.08-E04

SIZE
A3

REV
13

DATE
12/06/09