


1 2 3 4 5 6 7 8


A

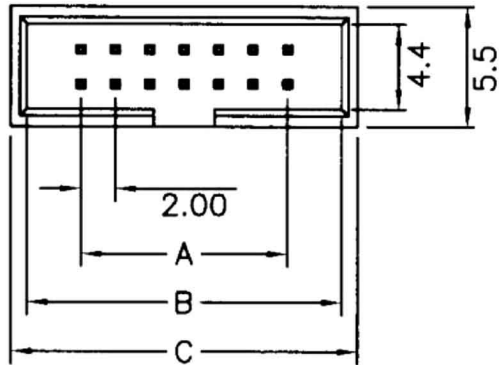

B


C

D

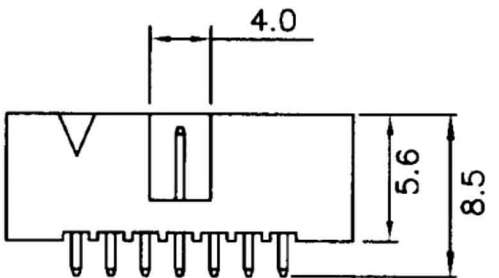

E

F

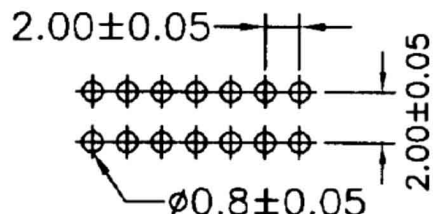

P.C. Board Layout

G

H

1 2 3 4 5 6 7 8

NOTES

- * Poles:2X3~2X34
- * Material:Insulator:NYLON 6T UL94V-0 BLACK
- * Contact:0.50mm(.020") square pin,brass.gold plated

Specifications

- * Current rating: 1A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -40°C~+105°C
- * Insulation resistance: 5,000MΩ min.
- * Withstand voltage: 800 AC/minute
- * Applicable PC board thickness: .063" (1.6mm)

CIRCUITS	DIMENSION mm			CIRCUITS	DIMENSION mm		
	A	B	C		A	B	C
6	4.00	12.10	13.20	34	32.00	40.10	41.20
8	6.00	14.10	15.20	36	34.00	42.10	43.20
10	8.00	16.10	17.20	38	36.00	44.10	45.20
12	10.00	18.10	19.20	40	38.00	46.10	47.20
14	12.00	20.10	21.20	44	42.00	50.10	51.20
16	14.00	22.10	23.20	48	46.00	54.10	55.20
18	16.00	24.10	25.20	50	48.00	56.10	57.20
20	18.00	26.10	27.20	54	52.00	60.10	61.20
22	20.00	28.10	29.20	56	54.00	62.10	63.20
24	22.00	30.10	31.20	60	56.00	66.10	67.20
26	24.00	32.10	33.20	62	60.00	68.10	69.20
28	26.00	34.10	35.20	64	62.00	70.10	71.20
30	28.00	36.10	37.20	68	66.00	74.10	75.20
32	30.00	38.10	39.20				

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 Betty		TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°
DWG. 製圖 Betty		SCALE 比例 參考
DATE 制表日 2012/08/13	UNIT 單位 MM	SIZE 紙張尺寸 A 4
	PAGE 張數 1 OF 1	REV. 版次 A

PART NAME 品名
BOX HEADER 2.0mm X 2.0mm XXP
STRAIGHT TYPE GOLD FLASH PLATING
BLACK COLOR NYLONT 6T ROHS

PART NO.
料號 C9510-XXSNGB00R

A

B

C

D

E

F

G

H