
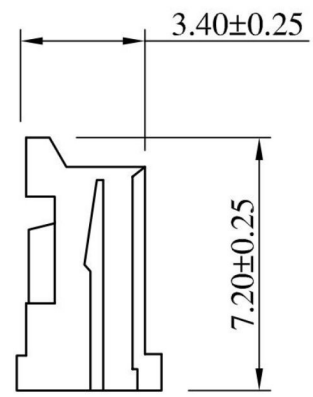
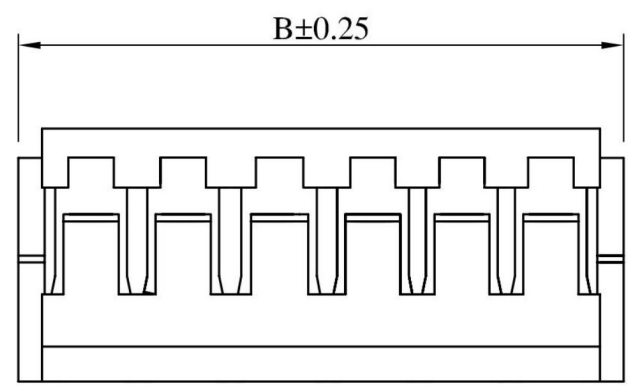


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

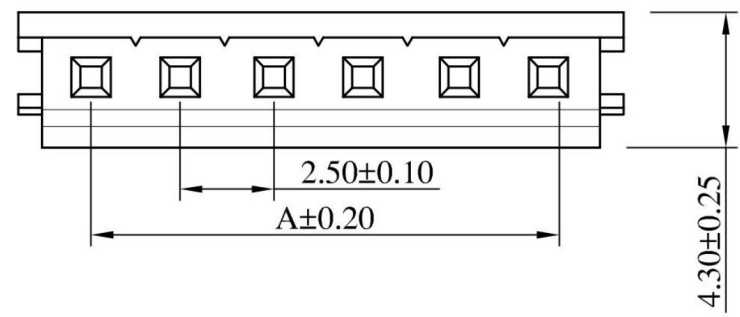

SPECIFICATIONS

Current rating : 3A AC,DC
 Voltage rating : 250V AC,DC
 Temperature range : -25°C to +85 °C
 Contact resistance : 10mΩ Max.
 Insulation resistance : 1000MΩ Min.
 Withstanding voltage : 800V AC/minute
 Material : Nylon 66, UL94V-0

Poles	Dimension (mm)	
	A	B
2	2.50	7.00
3	5.00	9.50
4	7.50	12.00
5	10.00	14.50
6	12.50	17.00
7	15.00	19.50
8	17.50	22.00
9	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00
13	30.00	34.50
14	32.50	37.00
15	35.00	39.50

RoHS Compliant		HSM 玄茂科技股份有限公司 HSIUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		GENERAL TOLERANCE X.XX ± 0.2 X.X ± 0.3	PART NAME 品名 2.5mm HOUSING XXP WHITE INSULATOR ROHS
DWG. 製圖 BETTY	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 H2520-XXPW0000R
DATE 製表日 2011/03/11	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4	REV. 版次 A

1 2 3 4 5 6 7 8