






1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

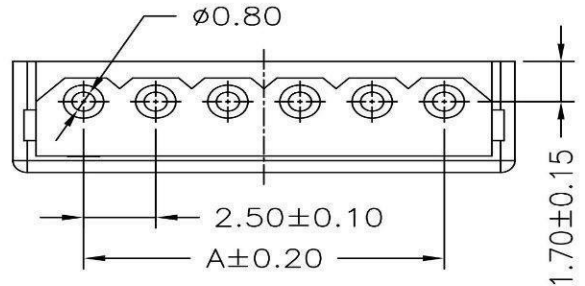

**SPECIFICATIONS**  
 Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 1000V AC/minute

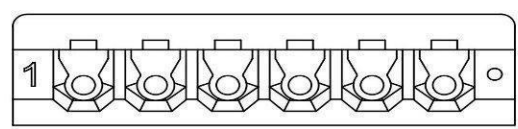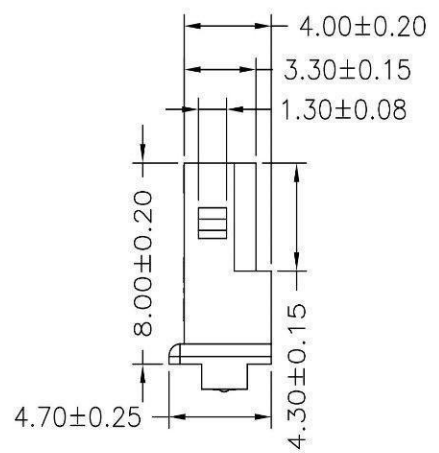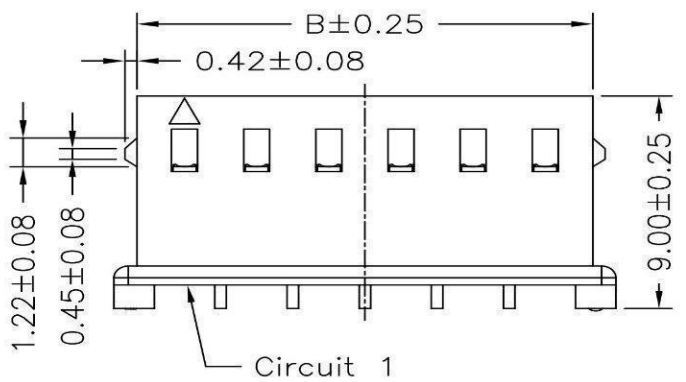

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	2.50	5.80	10P	22.50	25.80
03P	5.00	8.30	11P	25.00	28.30
04P	7.50	10.80	12P	27.50	30.80
05P	10.00	13.30	13P	30.00	33.30
06P	12.50	15.80	14P	32.50	35.80
07P	15.00	18.30	15P	35.00	38.30
08P	17.50	20.80	16P	37.50	40.80
09P	20.00	23.30			

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE X. X±0.25 X. XX±0.15 X. XXX±0.05	PART NAME 品名 2.5mm HOUSING 1*XXP WHITE COLOR ROHS
DWG. 製圖 Karen	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 H2530-XXPW0000R
DATE 制表日 2012/1/3	PAGE 張數 1 OF 1	REV. 版本 B	

1 2 3 4 5 6 7 8