

1 2 3 4 5 6 7 8

A

B

C



D

E

F

G

H

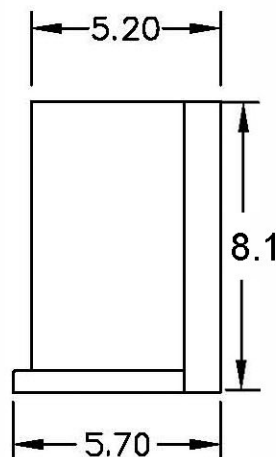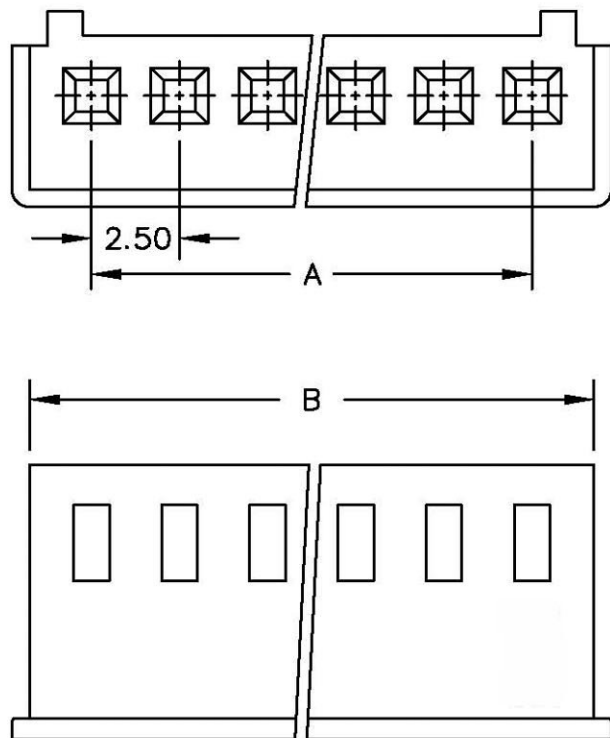

**SPECIFICATIONS**

Current rating : 2A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 20mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-2

**Ordering Information & Dimensions**

Poles	Dimension (mm)	
	A	B
2	2.50	6.00
3	5.00	8.50
4	7.50	11.00
5	10.00	13.50
6	12.50	16.00
7	15.00	18.50
8	17.50	21.00
9	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.  
核准  
DWG.  
製圖 HELEN  
DATE 制表日  
2009/6/29

SCALE  
比例 參考  
UNIT  
單位 MM  
PAGE  
張數 1 OF 1

TOLERANCE  
容許公差  
0 ± 0.3  
.00 ± 0.2  
ANG. ±  
SIZE.  
紙張尺寸 A4  
REV.  
版次 A  
PART NAME 品名  
2.5mm HOUSING XXP IVORY  
ROHS LOW-LEAD  
PART NO.  
料號 H2560-XXPI0000R

1 2 3 4 5 6 7 8