




FEATURES:

- . 2-28 Circuits
- . With locking ramp
- . Nylon 66, [UL 94-2]
- . Mates with .025" [0.64mm] pins
- . End type
- . Terminal retention to housing 6.6lbs [3.0kg] minimum

SPECIFICATIONS:

- . Current rating: 3A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C .
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand voltage: 1500V AC/minute
- . Applicable wire: AWG #22 ~ #28

Contact Plating: Tin 80~120u"

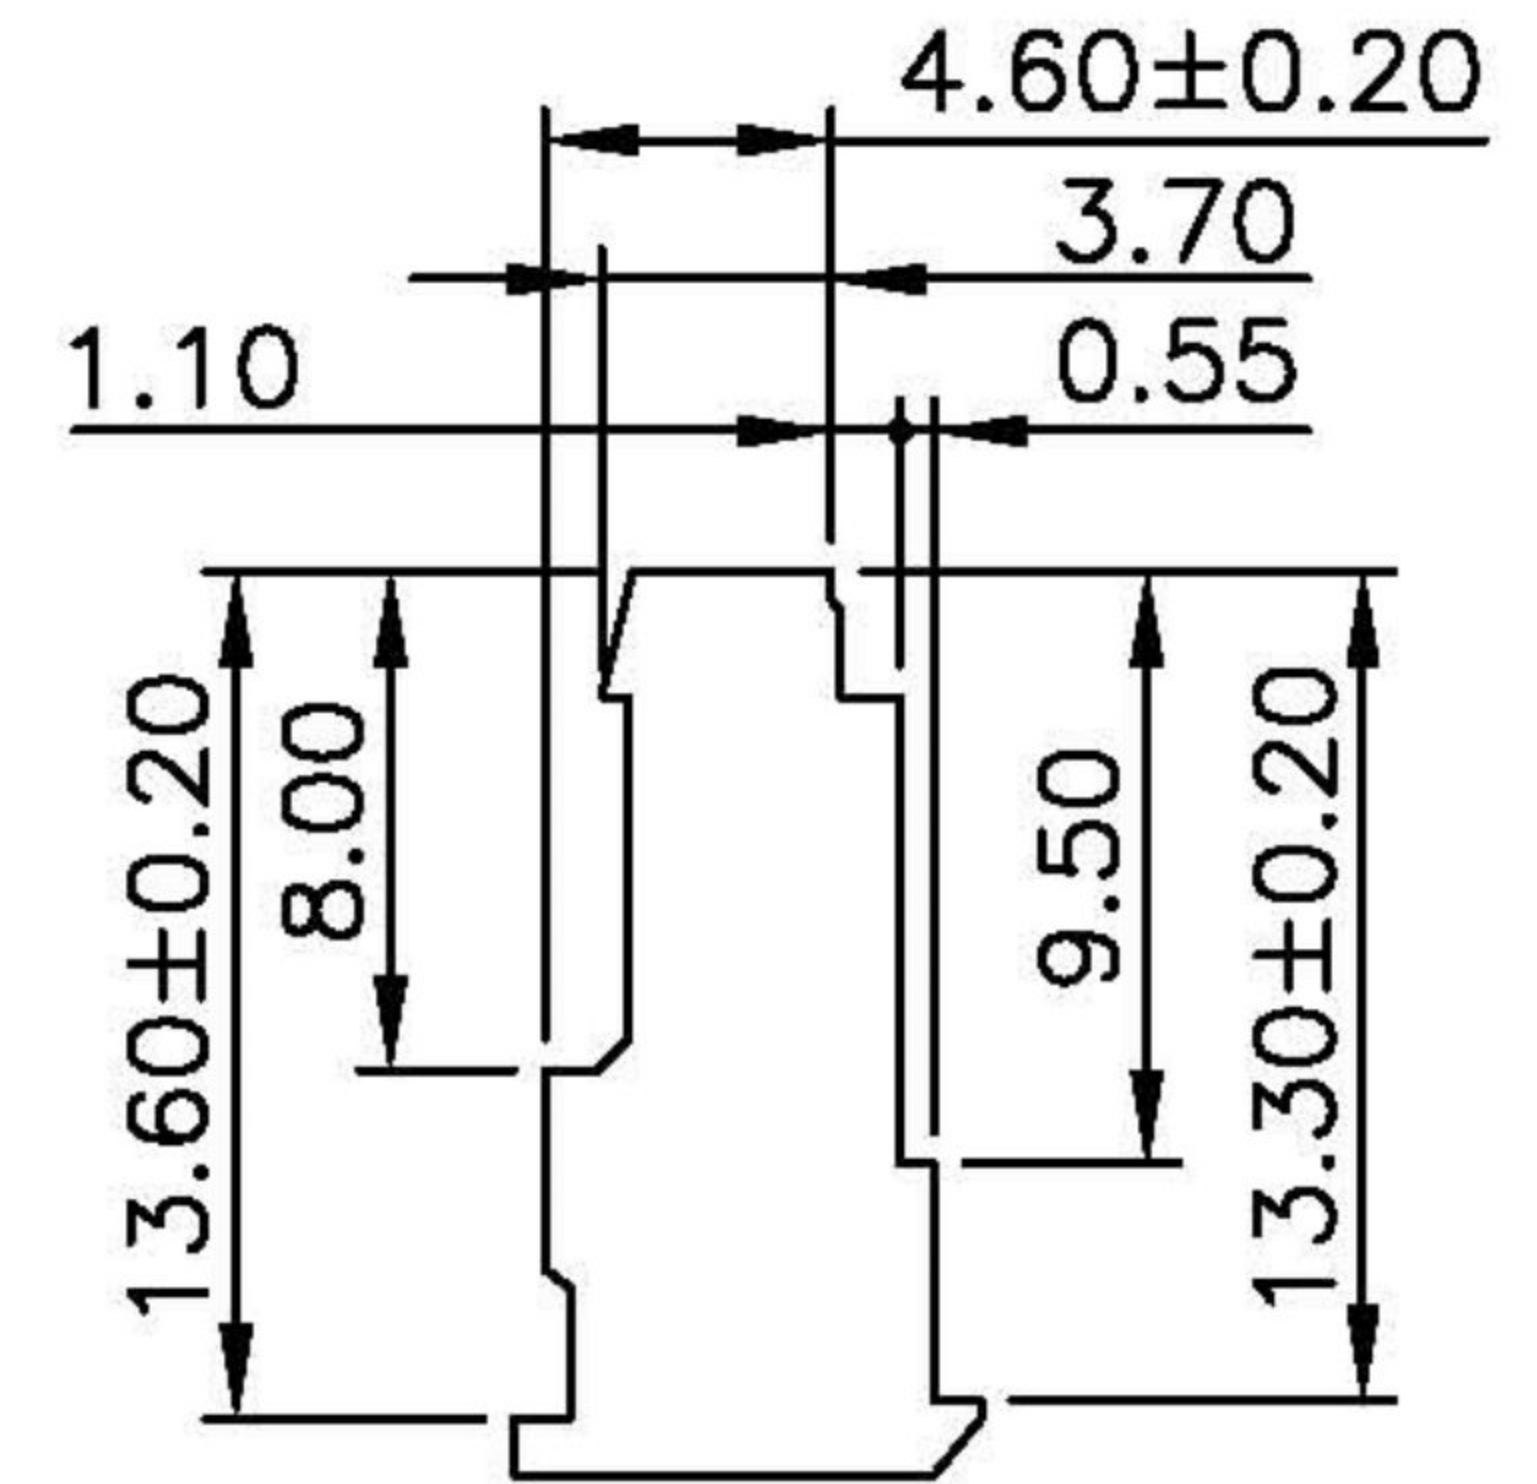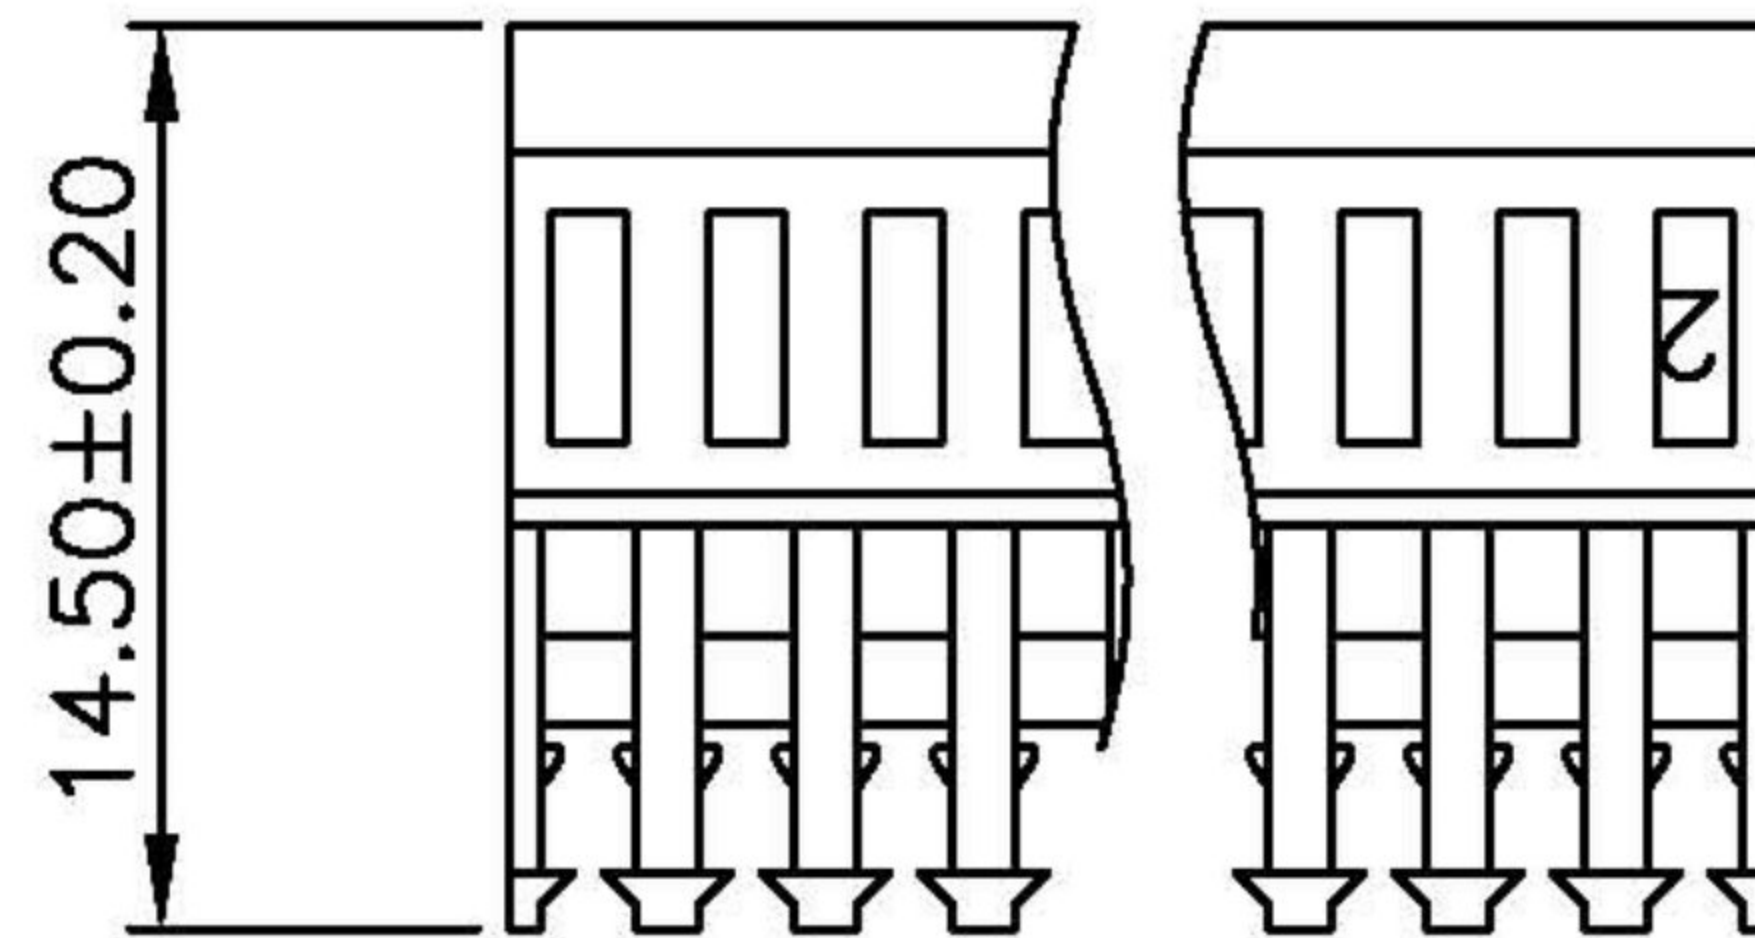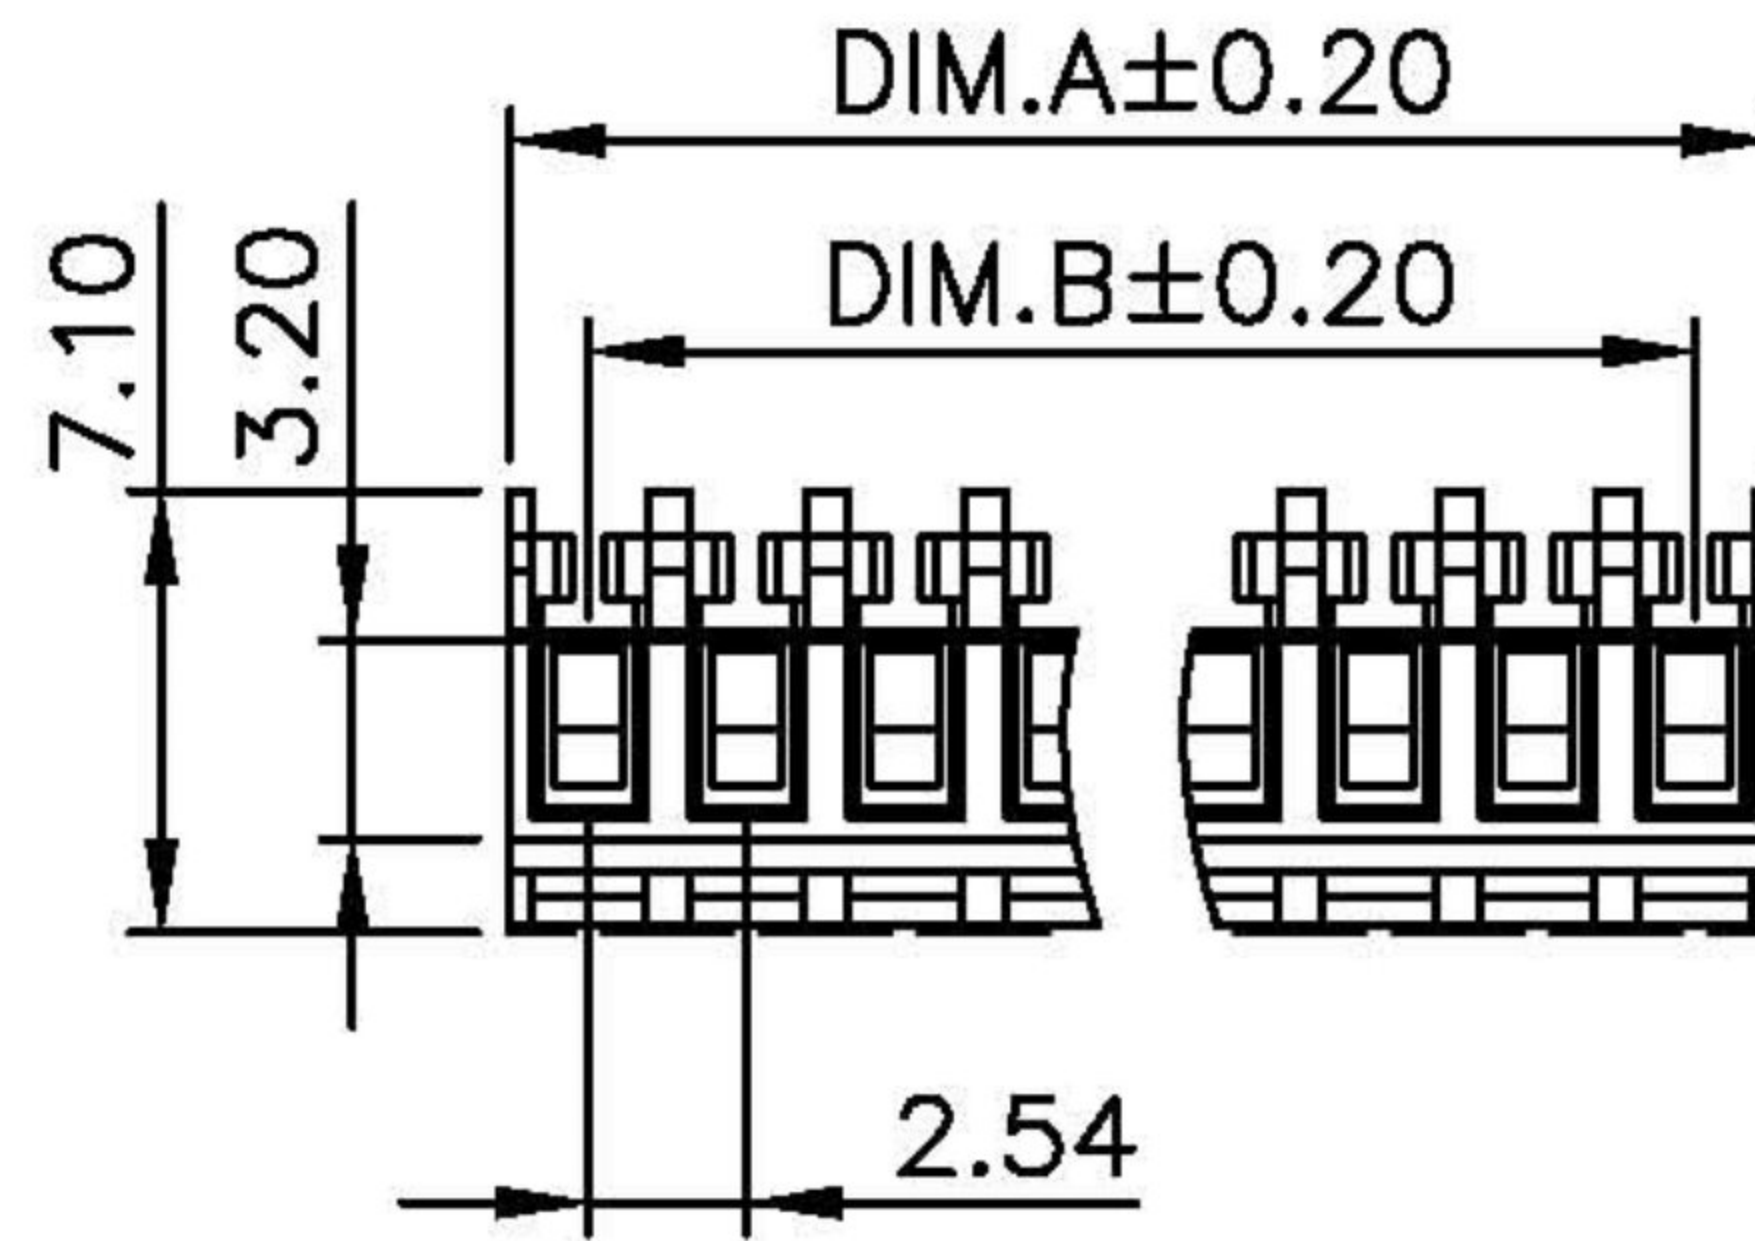

PIN 數	DIM.A	DIM.B
02	5.08	2.54
03	7.62	5.08
04	10.16	7.62
05	12.70	10.16
06	15.24	12.70
07	17.78	15.24
08	20.32	17.78
09	22.86	20.32
10	25.40	22.86

PIN 數	DIM.A	DIM.B
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48
14	35.56	33.02
15	38.10	35.56
16	40.64	38.10
17	43.18	40.64
18	45.72	43.18
19	48.26	45.72

PIN 數	DIM.A	DIM.B
20	50.80	48.26
21	53.34	50.80
22	55.88	53.34
23	58.42	55.88
24	60.96	58.42
25	63.50	60.96
26	66.04	63.50
27	68.58	66.04
28	71.12	68.58

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE X.X ± 0.20 X.XX ± 0.10 X.XXX ± 0.05 Angle X ± 2° X.X ± 1'	PART NAME 品名 2.54mm HOUSING XXP XXAWG TIN PLATED WHITE COLOR(UL94V2) CLOSE END TYPE ROHS
DWG. 製圖 ABBY	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	SIZE. 紙張尺寸 A4 REV. 版次 A	PART NO. 料號 H8254-XXPXTW00R
DATE 制表日 2012/05/22			