


1 2 3 4 5 6 7 8

A

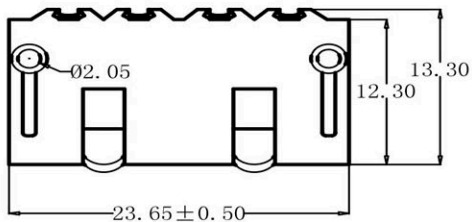

B

C


D

E

F



G

H

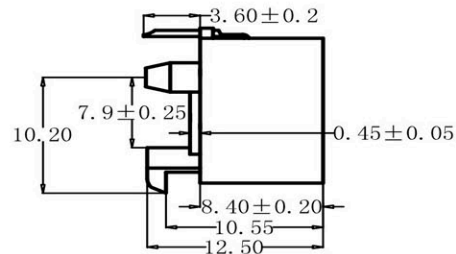

Specifications:

- Material:
Bass: Nylon 66 UL 94V-2
Contact: Brass, Tin-Plated
- Voltage Rating: 250V
- Current Rating: 7A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10mΩ max.

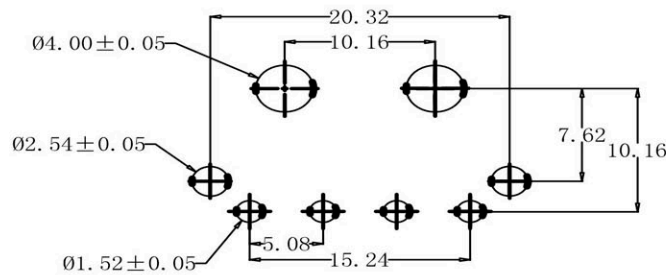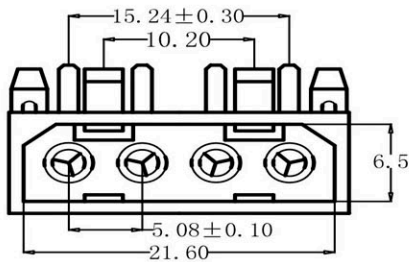

P.C.B LAYOUT

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 0 ±0.25 .00 ± ANG ±	PART NAME 品名 5.08mm POWER PLUG 4P RIGHT ANGLE TYPE TIN PLATED WHITE COLOR ROHS
DWG. 製圖 Helen			
DATE 制表日 2014/3/28	PAGE 張數 1 OF 1	REV. 版本 B	PART NO. 料號 W2470-04PRTW00R

1 2 3 4 5 6 7 8