


Feature:

- 2 to 15 Circuits
- 0.25" (0.64mm) Right angle square pins
- Friction lock
- Various pin lengths available
- 94V-0 Nylon
- Mates with H2630 housings
- Tin plated brass pins. Plating options available

Specifications:

- Voltage Rating: 250V AC/DC.
- Current Rating: 3 A MAX
- Temperature Range: -40°C to 105°C
- Dielectric Strength: AC 1500V 60/Sec

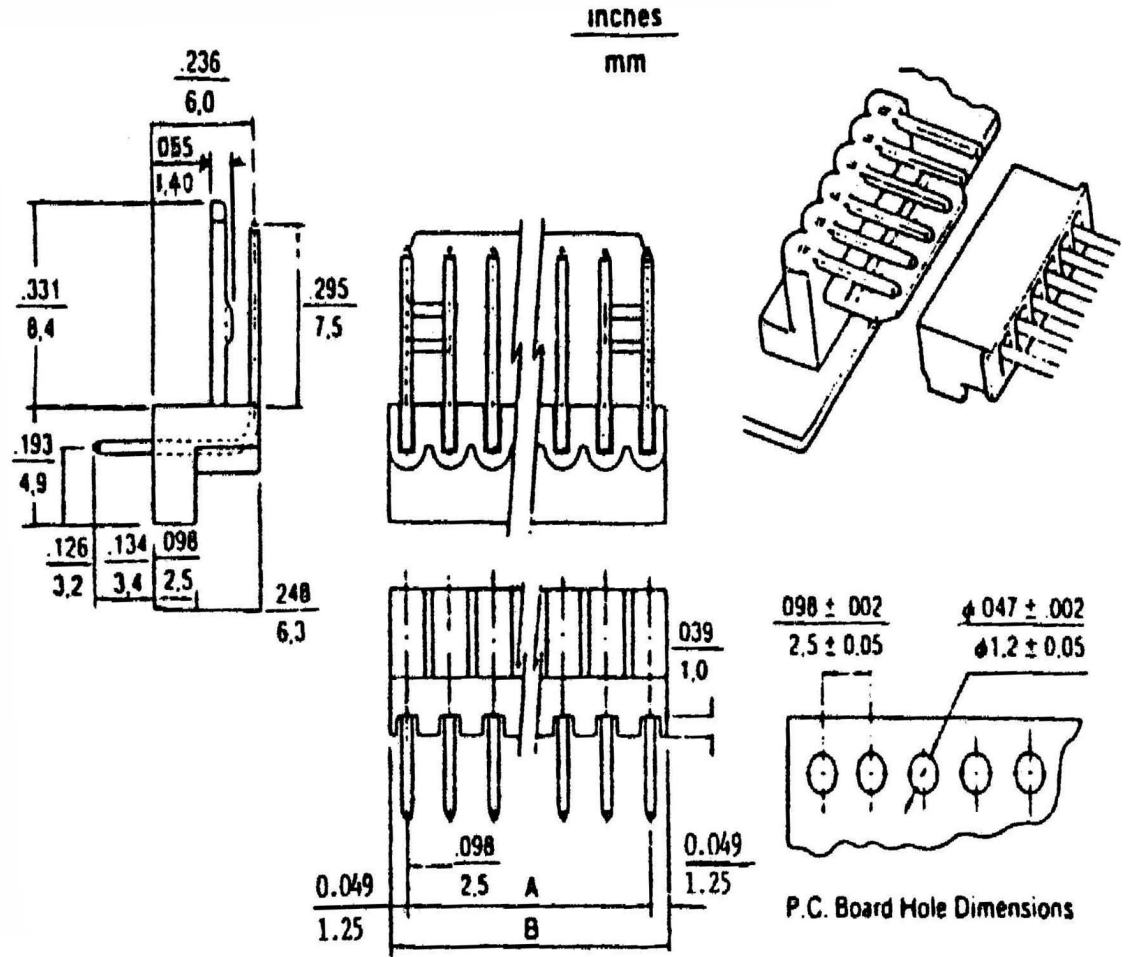

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5	5.0	9	20.0	22.5
3	5.0	7.5	10	22.5	25.0
4	7.5	10.0	11	25.0	27.5
5	10.0	12.5	12	27.5	30.0
6	12.5	15.0	13	30.0	32.5
7	15.0	17.5	14	32.5	35.0
8	17.5	20.0	15	35.0	37.5

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE 容許公差 .000 ±0.08 (mm) .00 ±0.25 .0 ±0.4	PART NAME 品名 2.5mm WAFER XXP RIGHT ANGLE TYPE TIN PLATED BEIGE COLOR ROHS LOW-LEAD
DWG. 製圖 BETTY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 W2730-XXPRTC00R
DATE 制表日 2010/2/1	PAGE 張數 1 OF 1	REV. 版次 B	