


**Features:**

- 2 ~ 20 circuits available
- .025" (0.64mm) straight square pins
- Friction lock
- Various pin length available
- UL 94V-0 nylon
- Mates with H2630 series housings
- Tin-plated brass pins. Plating options available

**Specifications:**

- Current rating: 3A max.
- Voltage rating: 250V AC, DC
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

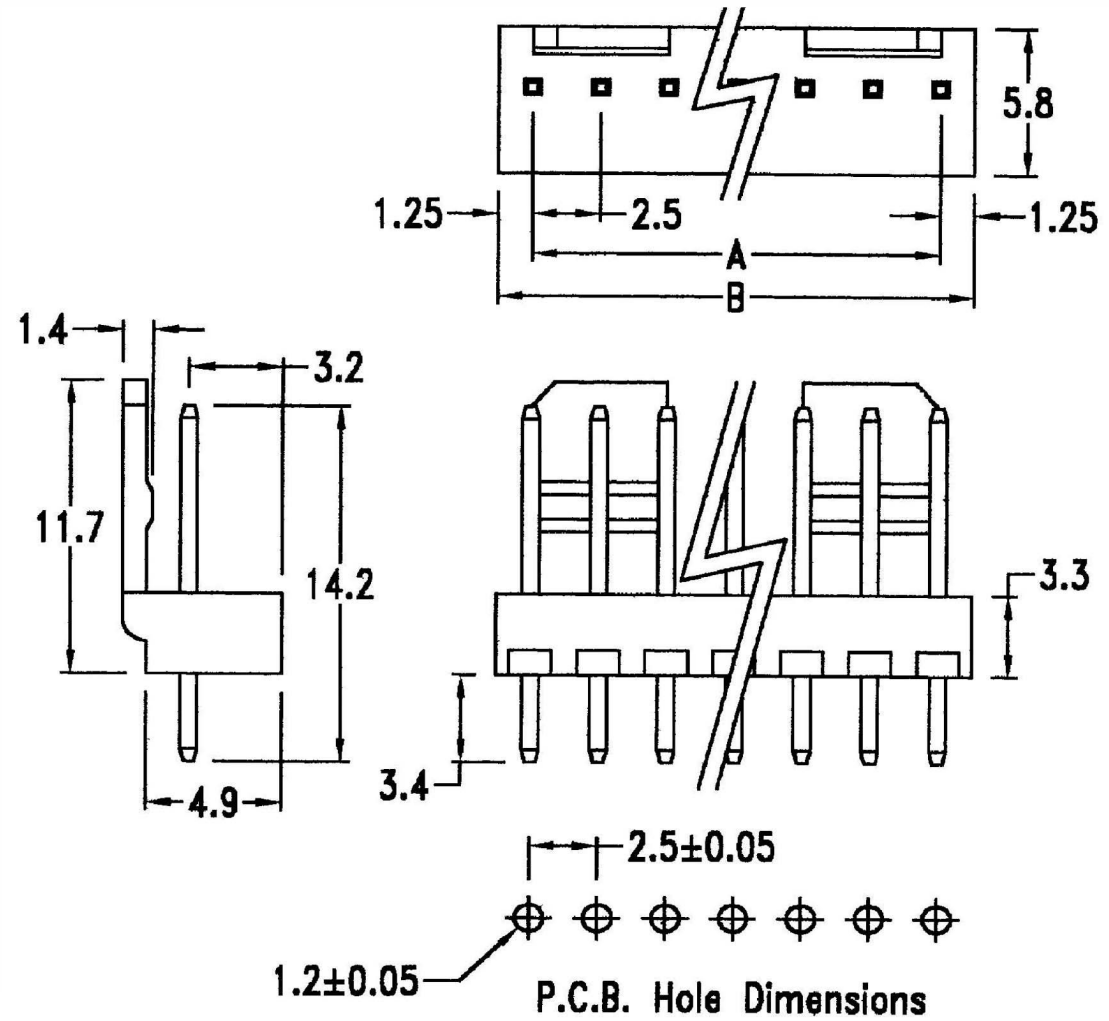

**Dimensional Information ( mm )**

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5	5.0	9	20.0	22.5
3	5.0	7.5	10	22.5	25.0
4	7.5	10.0	11	25.0	27.5
5	10.0	12.5	12	27.5	30.0
6	12.5	15.0	13	30.0	32.5
7	15.0	17.5	14	32.5	35.0
8	17.5	20.0	15	35.0	37.5

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.08 ( mm ) .00 ± 0.25 ( mm ) .0 ± 0.4 ( mm )	PART NAME 品名 2.5mm WAFER XXP STRAIGHT TYPE TIN PLATED BEIGE COLOR ROHS LOW-LEAD
DWG. 製圖 BETTY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 W2730-XXPSTC00R
DATE 制表日 2010/2/1	PAGE 張數 1 OF 1	REV. 版次 B	