

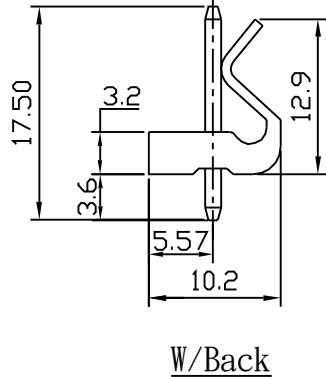


**SPECIFICATION**

Voltage Rating: 250V AC/DC  
 Current Rating: 5A AC/DC  
 Temperature Range: -25 ° C ~+85 ° C  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1,000 Megohms Min.  
 Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.  
 Material: Nylon 66, UL94V-2  
 Color: White  
 Pin: Brass, Tin Plated

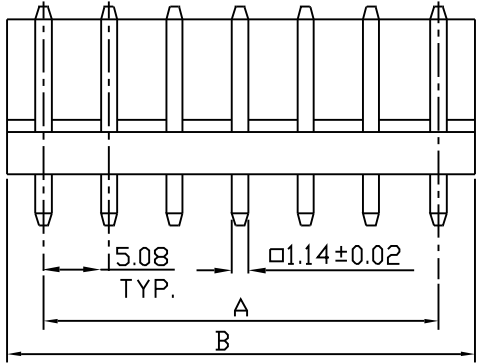

Poles	Dimension		
	A	B	C
2	5.08	10.22	10.30
3	10.16	15.30	15.40
4	15.24	20.38	20.50
5	20.32	25.46	25.60
6	25.40	30.54	30.70
7	30.48	35.62	35.80
8	35.56	40.70	41.00
9	40.64	45.78	46.10
10	45.72	50.86	51.20

**ORDER INFORMATION**

W4508-	Contact No. <input type="text" value="10"/> 02-10	Contact Type <input type="text" value="P"/> P: Non Distribution	Function <input type="text" value="S"/> S: Straight	Body Option <input type="text" value="Y"/> Y: W/ Back N: W/O Back	Contact Plating <input type="text" value="T"/> T: Tin S: Selective Gold G: Gold Flash	Insulator Color <input type="text" value="W"/> W: White	<input type="text" value="0"/> Fill It With "0"
--------	---	---	---	--	---	---	--

**玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

UNIT		SCALE	PART NAME	
MM		3:1	MX5.08 WAFER 180°	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	W4508-XXPSXXW0	A

制表日: 2002/12/04

DRAWING.	APPROVED
Jane	