


1 2 3 4 5 6 7 8

A

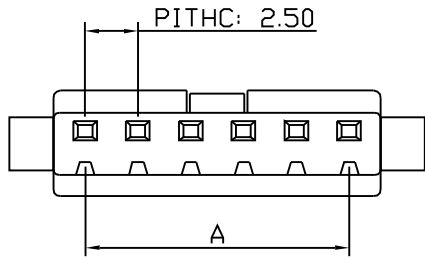

B

C

SPECIFICATION

Electric

Current Rating: 2A AC, DC

Voltage Rating: 250V AC, DC

Temperature Range: -25° C ~+85° C

Contact Resistance: 20m ohms max.

Insulation Resistance: 1,000M ohms Min.


Withstanding Voltage: 800V AC/minute.

Material: Nylon 66, UL94V-0


Color: Black

A

D

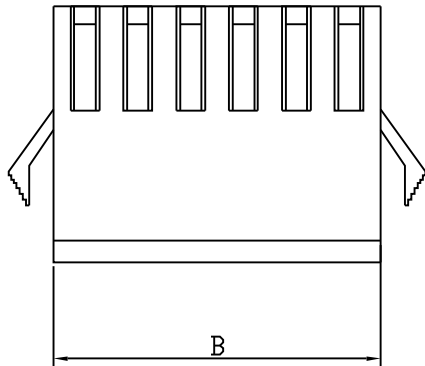

E

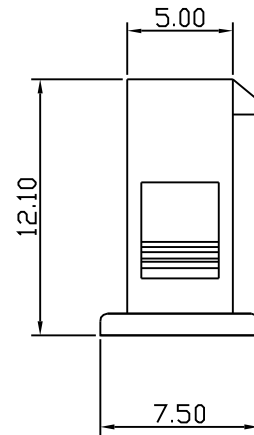

F

POLES	A	B
02	2.50	5.50
03	5.00	8.00
04	7.50	10.50
05	10.00	13.00
06	12.50	15.50
07	15.00	18.00
08	17.50	20.50
09	20.00	23.00
10	22.50	25.50
11	25.00	28.00
12	27.50	30.50

D

E

F

G

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

1:1

2.5mm HOUSING

H

制表日: 2002/12/15

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Jane

± 0.3

H2320-XXPB0000

A

1 2 3 4 5 6 7 8