
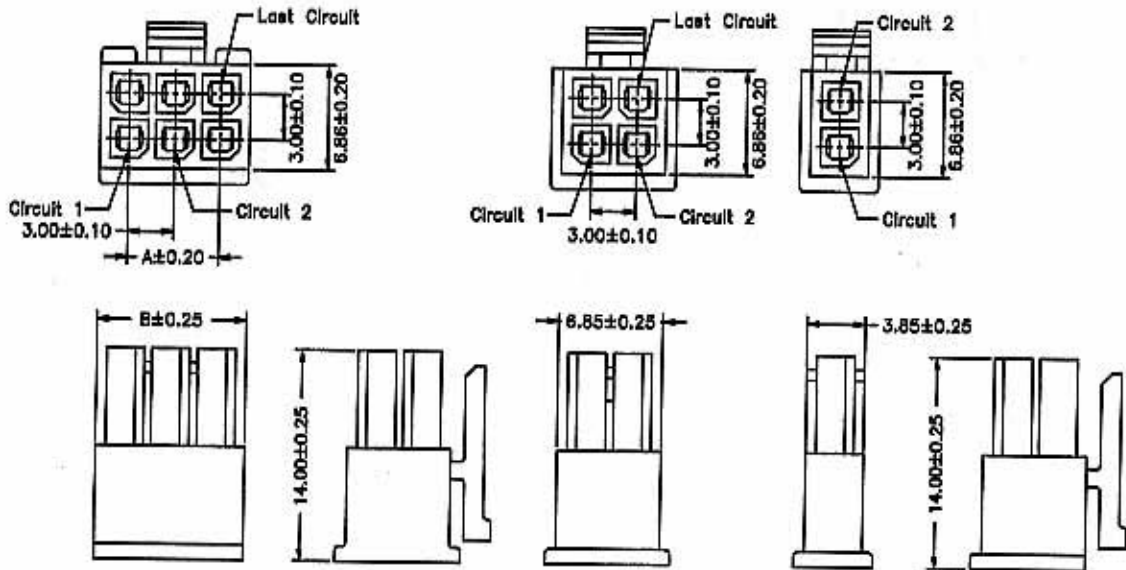


Ordering Information & Dimensions

Dimensions	
A	B
---	3.85
3.00	6.85
6.00	9.85
9.00	12.85
12.00	15.85
15.00	18.85
18.00	21.85
21.00	24.85
24.00	27.85
27.00	30.85
30.00	33.85
33.00	36.85



2X3P~2X12P

2X2P

2X1P

SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

2:1

3mm PITCH HOUSING
 RECEPTACLE MICRO FIT

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2004/04/06

DRAWING.

APPROVED

± 0.2

H4130-XXPDB00

A

judy