


1 2 3 4 5 6 7 8

A

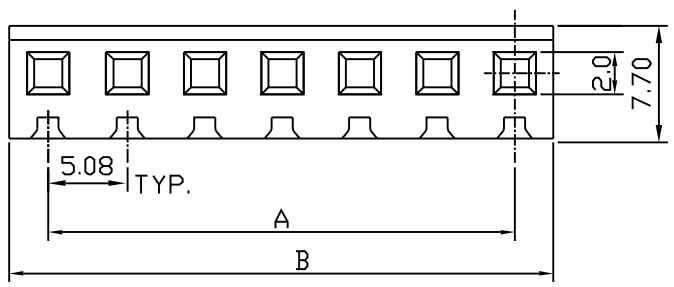

SPECIFICATION
 Voltage Rating: 250V AC/DC
 Current Rating: 5A AC/DC
 Temperature Range: -25 ° C ~+85 ° C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1,000 Megohms Min.
 Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.
 Material: Nylon 66, UL94V-2
 Color: White

A



B

B

C

C

D

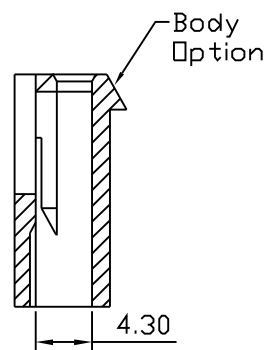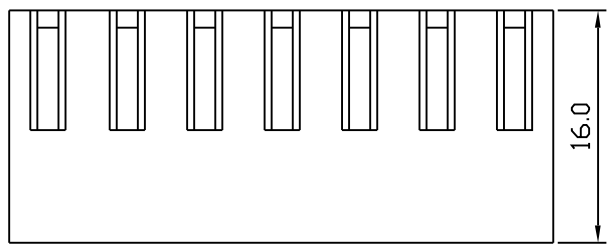

Poles	Dimension	
	A	B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.44
7	30.44	35.48
8	35.48	40.56
9	40.56	45.64
10	45.64	50.72

D

E

E

ORDER INFORMATION

H5080 -
02-10 P: Non Distribution Y: W/Locking Rib W: White Fill It With "0" Fill It With "0" Fill It With "0"

F

F

G

G

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		3:1	MX5.08 HOUSING	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	H5080-XXPXW000	A

H

H

制表日: 2002/12/04 DRAWING. *Jane* APPROVED

1 2 3 4 5 6 7 8