



Specifications:

- Material: Nylon 66 UL 94V-2 or 94V-0
- Voltage Rating: 600V
- Current Rating: 8A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -40°C~+105°C
- Contact Resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.

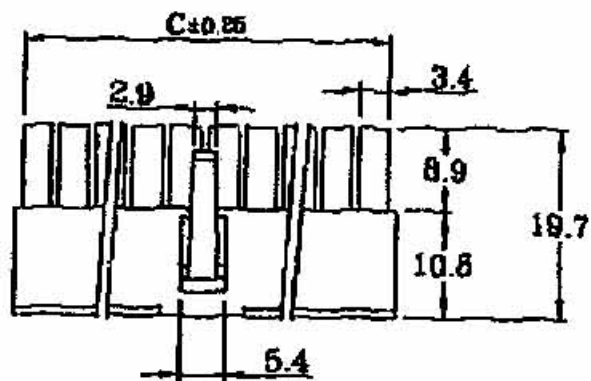

Dimensions mm			
	A	B	C
02		5.50	5.50
04	4.20	9.70	7.60
06	8.40	13.90	11.80
08	12.60	18.10	16.00
10	16.80	22.30	20.20
12	21.00	26.50	24.40
14	25.20	30.70	28.60
16	29.40	34.90	32.80
18	33.60	39.10	37.00
20	37.80	43.30	41.20
22	42.00	47.50	45.40
24	46.20	51.70	49.60

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2002/05/09

DRAWING.

Jane

APPROVED

APPD.

CKD.

UNIT

MM

SCALE

2:1

TOLERANCE

± 0.3

PART NAME

4.2mm MINI-FIT HOUSING
(MALE)

PART NO.

H5150-XXPDW000

REV.

A