

1 2 3 4 5 6 7 8

A

A

SPECIFICATION

Electric

Current Rating: 2A AC, DC

Voltage Rating: 250V AC, DC

Temperature Range: -25 ° C ~+85 ° C

Contact Resistance: 20m ohms max.


Insulation Resistance: 1,000M ohms Min.

Withstanding Voltage: 1,000V AC/minute.

Material: Nylon 66, UL94V-0

B

B

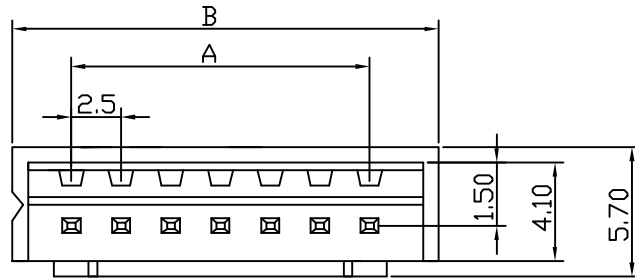


C

C

POLES	A	B
02	2.50	7.30
03	5.00	9.80
04	7.50	12.30
05	10.00	14.80
06	12.50	17.30
07	15.00	19.80
08	17.50	22.30
09	20.00	24.80
10	22.50	27.30
11	25.00	29.80
12	27.50	32.30
13	30.00	34.80
14	32.50	37.30
15	35.00	39.80
16	37.50	42.30
17	40.00	44.80
18	42.50	47.30
19	45.00	49.80
20	47.50	52.30

D

D

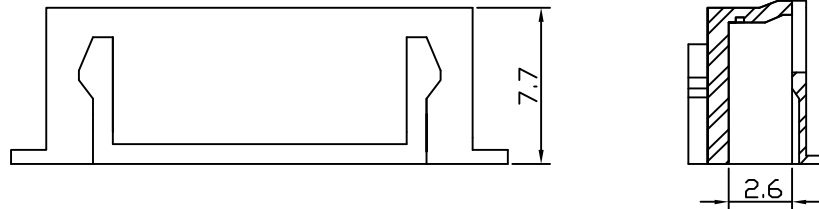

E

E

F

F

G

G

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

3:1

XH2.5mm HOUSING

H

H

制表日: 2001/06/15

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Jane

± 0.3

H7000-XXPW0000

A

1 2 3 4 5 6 7 8