
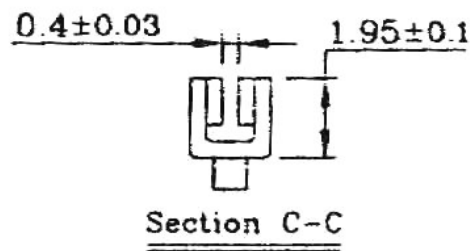



SPECIFICATIONS

Current Rating: 3A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25 C ~+85 C
 Contact Resistance: 20m Max
 Insulation Resistance: 1,000M Min.
 Withstanding Voltage: 800V AC/Minute
 Wire Range: AWG #22~26
 Thickness: 0.2mm
 Insulation OD: 1.8~1.4MM
 Material: Brass
 Finish: Tin Plated
 Q'ty: 10,000 pcs/Roll



玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2002/12/04
 DRAWING. *Angus*
 APPROVED

UNIT		SCALE	PART NAME	
MM		2:1	TERMINAL	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		±0.5	T2480-TBI00000	A