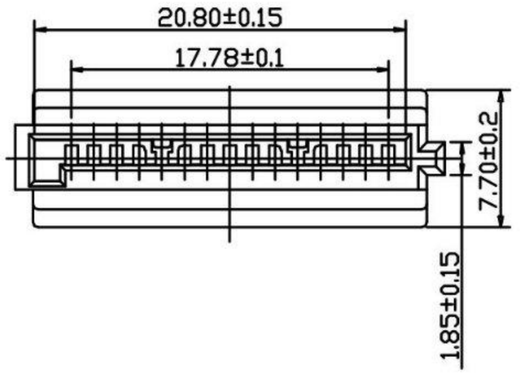

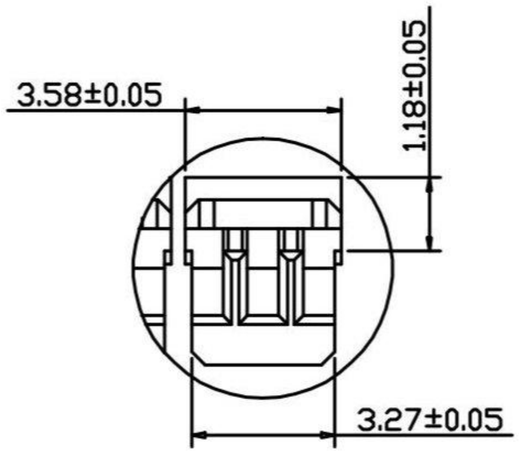

DETAIL:B(2:1)

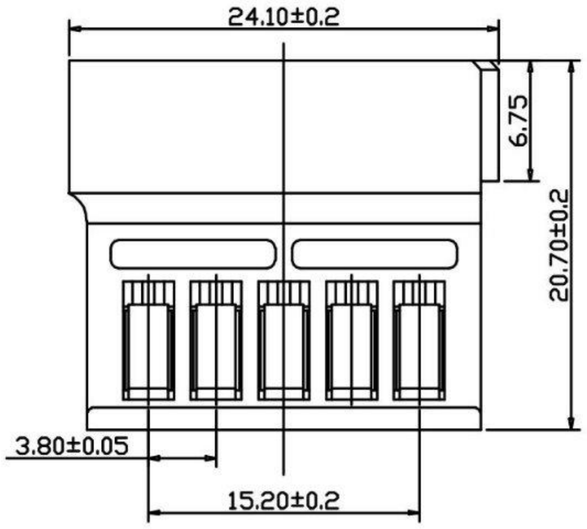

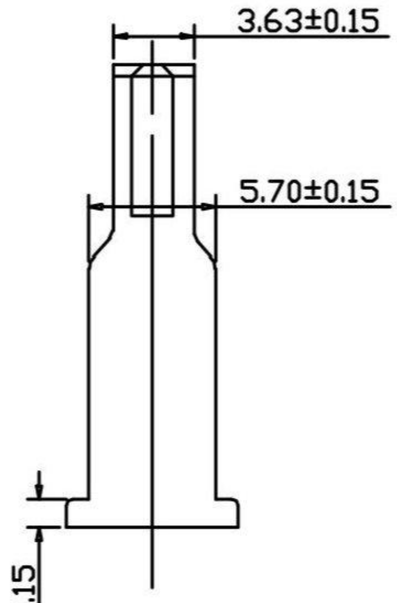

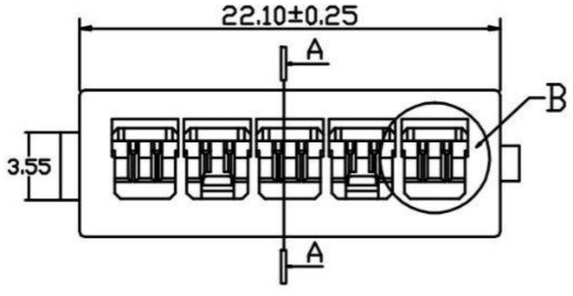

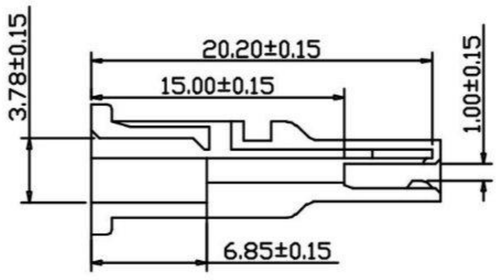

SECTION:A-A

NOTES:
1. CURRENT RATING: 1.5A AC/DC.
2. VOLTAGE RATING: 15V AC/DC.
3. TEMPERATURE RANGE: -25°C~+85°C.
4. CONTACT RESISTANCE: 20mΩ MAX.
5. INSULATION RESISTANCE:1000MΩ MIN.
6. WITHSTANDING VOLTAGE:500V AC/MINUTE.
7. MATERIAL:PBT+15%GF UL94V-0 .
8. FLASH: 0.05MAX;WARPAGE: 0.08MAX.
9. MARK" * "INDICATE DIMENSIONS NEED TO CONTROLLED IN QIP.
10. MARK" (XX) "INDICATE DIMENSIONS NEED TO CONTROLLED IN FAI.



DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	±0.15	X.X°	±2°
X.XX	±0.10	X.XX°	±1°
X.XXX	±0.05	X.XXX°	/

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名: 1.27mm CRIMP TERMINAL HOUSING 15P BLACK INSULATOR ROHS (*SATA HOUSING)
DWG. 製圖: HELEN	SCALE 比例: 參考	SIZE. 紙張尺寸: A4	
DATE 制表日: 2011/9/16	UNIT 單位: MM	REV. 版次: A	PART NO. 料號: H1270-15PB0000R
	PAGE 張數: 1 OF 1		