

1 2 3 4 5 6 7 8

A

B

C




D

E

F

G

H

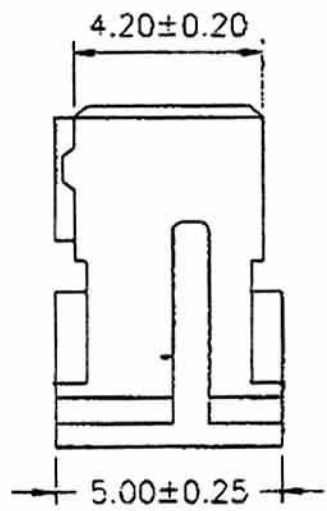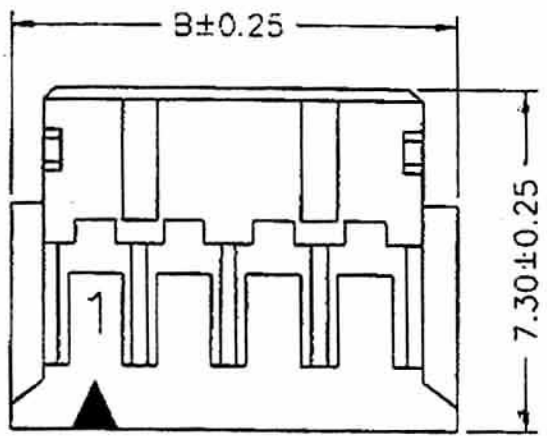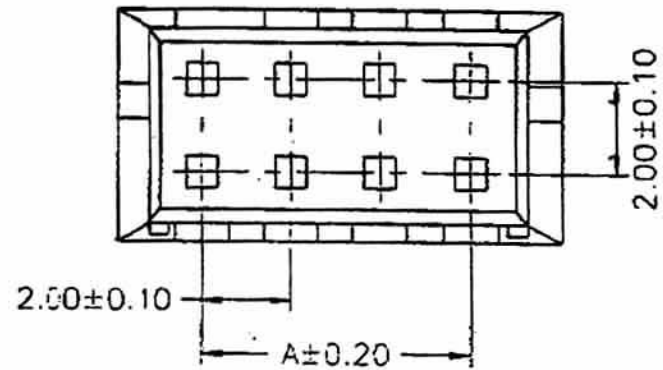

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Terminal Material: Phosphor Bronze/Tin-plated
 Material: Nylon 66,UL94V-0

| CIRCUITS | DIMENSION | | PACKING PCS/BAG |
|----------|-----------|-------|--------------------|
| | A | B | |
| 2x2 | 2.00 | 5.90 | 1,000 |
| 2x3 | 4.00 | 7.90 | 1,000 |
| 2x4 | 6.00 | 9.90 | 1,000 |
| 2x5 | 8.00 | 11.90 | 1,000 |
| 2x6 | 10.00 | 13.90 | 1,000 |
| 2x7 | 12.00 | 15.90 | 1,000 |
| 2x8 | 14.00 | 17.90 | 1,000 |
| 2x9 | 16.00 | 19.90 | 1,000 |
| 2x10 | 18.00 | 21.90 | 1,000 |
| 2x11 | 20.00 | 23.90 | 1,000 |
| 2x12 | 22.00 | 25.90 | 1,000 |
| 2x13 | 24.00 | 27.90 | 1,000 |
| 2x14 | 26.00 | 29.90 | 1,000 |
| 2x15 | 28.00 | 31.90 | 1,000 |
| 2x16 | 30.00 | 33.90 | 1,000 |
| 2x17 | 32.00 | 35.90 | 1,000 |
| 2x18 | 34.00 | 37.90 | 1,000 |
| 2x19 | 36.00 | 39.90 | 1,000 |
| 2x20 | 38.00 | 41.90 | 1,000 |

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2003/07/18

| | |
|-------------|----------|
| DRAWING. | APPROVED |
| <i>Jane</i> | |

| | | | | |
|-------|------|-----------|-----------------------------------|------|
| UNIT | | SCALE | PART NAME | |
| MM | | 2:1 | 2.0mm PITCH HOUSING (DUAL ROW) | |
| APPD. | CKD. | TOLERANCE | PART NO. | REV. |
| | | ± 0.2 | H2003-XXPDW000 | A |

1 2 3 4 5 6 7 8