


Ordering Information & Dimensions

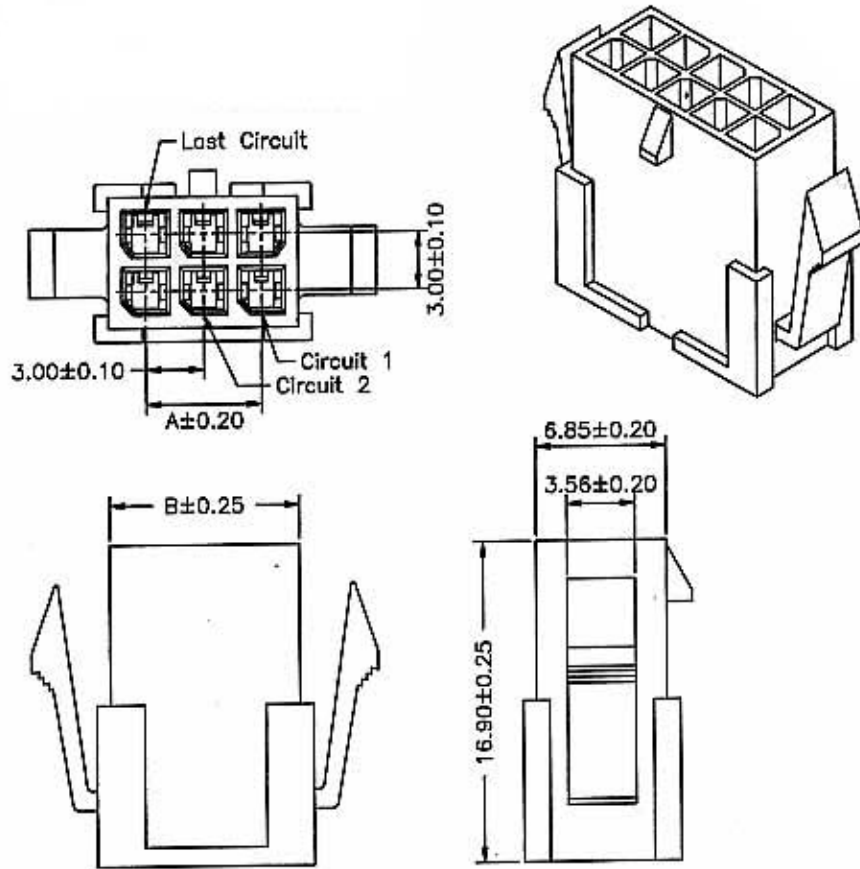

Dimensions	
A	B
---	3.85
3.00	6.85
6.00	9.85
9.00	12.85
12.00	15.85
15.00	18.85
18.00	21.85
21.00	24.85
24.00	27.85
27.00	30.85
30.00	33.85
33.00	36.85

SPECIFICATIONS
 Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		2:1	3mm PITCH HOUSING PLUG MICRO FIT	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.2	H4030-XXPDB00	A

制表日: 2004/04/06

DRAWING. APPROVED
judy

1 2 3 4 5 6 7 8